



- **Project Logistics Permitting and QA QC**  
**Project Logistics Permitting and QA QC** Steps to Secure a Municipal Foundation Repair Permit Coordinating Utility Markouts Before Pier Drilling Developing a Work Sequence to Minimize Downtime Creating a Safety Plan That Meets OSHA Guidelines Scheduling Third Party Inspections for Key Milestones Preparing As Built Elevation Logs for Engineer Review Managing Material Deliveries on Confined Job Sites Using Checklists to Track QA QC Tasks in Real Time Budget Control Methods for Foundation Projects Communication Strategies With Homeowners During Repairs Document Storage Solutions for Project Records Closing Out a Permit After Final Inspection Approval
- **Cost Financing and Warranty Structures**  
**Cost Financing and Warranty Structures** Factors That Influence Foundation Repair Pricing Understanding Pier Installation Quotes Line by Line Comparing Financing Options for Structural Repairs How Transferable Warranties Protect Future Owners Common Exclusions Found in Foundation Repair Contracts Calculating Return on Investment for Underpinning Services Payment Schedule Ideas to Align With Work Progress Evaluating Insurance Coverage for Structural Damage Estimating Long Term Savings From Preventive Upgrades Negotiating Warranty Terms With Contractors Impact of Material Choice on Overall Project Cost Tracking Repair Expenses for Tax Documentation
- **About Us**



# Line

## Project Scope Definition and Permitting Requirements for Foundation Repair

Okay, so you've got a pier installation quote in your hand. Congratulations, you're one step closer to getting that settled foundation! I've named the crack in my basement wall "Harold" because we've been together so long it deserved a proper title **house leveling service Des Plaines** Facebook. But let's be honest, these quotes can look like a foreign language. It's a jumble of terms, numbers, and cryptic abbreviations. Don't panic! We're going to decode it together, starting with that initial consultation and site assessment line.

Think of the initial consultation as the "getting to know you" phase. A reputable company isn't going to slap in piers willy-nilly. They need to understand *why* your house is settling, what's causing the problem, and what the soil is like beneath your foundation. This is where the site assessment comes in.

The site assessment is like a doctor's examination for your foundation. The inspector should be looking for cracks, sticking doors or windows, sloping floors – all the telltale signs of foundation movement. They'll likely ask you questions about the history of the house, any previous repairs, and any drainage issues you've noticed.

This assessment isn't just a visual inspection, though. Often, it includes soil testing. This involves taking samples of the soil around your foundation to determine its composition and load-bearing capacity. This is crucial because different types of soil react differently to moisture, and that influences how the piers need to be installed and how many are required.

Now, why is this "decoding" relevant to the quote? Because it's usually the first line item! You might see it listed as "Initial Consultation," "Site Evaluation," or something similar. This line covers the cost of the inspector's time, expertise, and potentially the soil testing.

Pay close attention to what this line includes. Is it a flat fee? Does it cover multiple visits if needed? Does it include a detailed report of their findings? A comprehensive assessment is worth its weight in gold. It ensures the pier installation is tailored to your specific problem, preventing future issues and saving you money in the long run.

If the quote jumps straight to pier installation costs without mentioning any kind of assessment, that's a major red flag. It suggests the company isn't taking the time to properly diagnose the problem, and they're likely offering a cookie-cutter solution that may not be effective.

In short, that initial consultation and site assessment line is the foundation of a successful pier installation. It's the crucial step that ensures the whole project is built on solid ground (literally!). So, ask questions, understand what's included, and don't be afraid to shop around for a company that prioritizes a thorough and informative assessment. Your foundation will thank you for it.

Okay, let's talk about piers. Specifically, how understanding the pier type and its placement is crucial when you're wading through those installation quotes. I mean, a quote that just says "Install piers" is about as helpful as a chocolate teapot, right? You need details!

Think of it like this: piers are the foundation's support system, the unsung heroes holding everything up. But there are different kinds of heroes, and each has its strengths and weaknesses. We're talking about things like concrete piers, helical piers, steel piers, and even variations within those categories. The *type* of pier chosen will impact the cost, the installation method, and ultimately, the stability of your foundation. A helical pier, for example, might be great for reaching deep into stable soil, but it could be overkill (and pricier!) if you're dealing with a less challenging soil profile.

Then there's the *placement*. This isn't just about sticking them in the ground randomly. A good quote will specify the number of piers, their spacing, and their location relative to the existing foundation. Why? Because the placement needs to address the specific problem areas. Are you seeing sagging floors? Cracks in the walls? The pier placement should directly correlate to those issues. A quote that doesn't explain *why* the piers are going where they are is a red flag. It suggests a lack of understanding of the underlying problem or, worse, a cookie-cutter approach that might not actually solve anything.

So, when you're looking at that quote, dig into the details. Ask questions! What kind of piers are they using? Why that type? Where are they placing them? Why that specific location? A good contractor will be able to explain their reasoning clearly and confidently. Understanding the pier type and placement is the key to knowing if you're getting a solution tailored to your needs, or just a generic band-aid on a structural problem. And that understanding is what separates a good quote from a potentially expensive mistake.

# Material Procurement and Quality Control Procedures

Alright, let's talk about the nitty-gritty of pier installation quotes, specifically focusing on the "Material Costs: Pier Components and Quantities" line. When you see this on your quote, don't glaze over! This is where you get a real sense of what you're actually paying for. It's essentially the recipe for your pier system, outlining each ingredient and how much of it they're planning to use.

Think of it like this: you wouldn't just agree to a restaurant bill without knowing what dishes you ordered, right? Same principle applies here. This section should break down the individual components of the pier system – things like the steel piers themselves, the brackets that connect the piers to your foundation, the shims used for leveling, and any other specialized hardware.

The "quantities" part is equally important. Are they using enough piers to properly support the load? Are they using appropriately sized brackets? This is where doing a little homework beforehand helps. Research what a typical pier installation looks like for your soil type and house size. That way, you can compare the quantities listed on the quote with what seems reasonable.

Don't be afraid to ask questions! If you see something that doesn't make sense, or if the quantities seem low compared to other quotes you've received, bring it up. A reputable contractor will be happy to explain their reasoning and walk you through the calculations they used to determine the necessary materials. Ultimately, understanding this section of the quote empowers you to make an informed decision and ensures you're getting a fair price for a robust and reliable pier system. It's about more than just the bottom line; it's about peace of mind knowing your foundation is in good hands (and supported by the right amount of steel!).



# Inspection and Testing Protocols During Foundation Repair



Okay, so you're staring at a pier installation quote, and one of the lines that probably jumps out at you is "Labor Expenses." It's often a big chunk of the total cost, and for good reason. Two major factors drive that labor expense: installation time and crew size. Think of it like this: the faster they can get the job done with fewer people, the less you'll pay. But it's not always that simple.

Installation time is pretty straightforward. A small, simple pier might only take a day or two to put in. A larger, more complex pier, especially one in difficult conditions like deep water or rocky terrain, could take a week or even longer. That time translates directly to labor hours, and labor hours cost money. The quote should ideally give you a reasonable estimate, and a good installer will be able to explain the factors that contribute to that estimate.

Then there's the crew size. A smaller crew might seem cheaper, but consider this: a larger, more experienced crew might actually finish the job faster, ultimately saving you money. Plus, a larger crew can handle heavier materials and more complex tasks more safely and efficiently. A too-small crew might struggle, leading to delays, mistakes, and even potential injuries. So, while a smaller crew might seem appealing on paper, it's important to understand why the installer chose that particular crew size and whether it's appropriate for the scope of your project. A reputable installer will be transparent about their reasoning and be able to justify the crew size they've allocated to your pier project. Don't be afraid to ask questions! Understanding how installation time and crew size impact the labor expenses will help you make a more informed decision.

# Documentation and Reporting for Permitting Compliance and QA/QC

Equipment and Permitting Fees: Unveiling Hidden Costs

So, youre getting a pier installed. Exciting! Youve probably envisioned lazy afternoons fishing, breathtaking sunsets, and maybe even a little private sunbathing. But before you get lost in the idyllic imagery, lets talk about the less glamorous, but utterly crucial, part of the process: the quote. Specifically, the line that often reads "Equipment and Permitting Fees." This seemingly simple phrase can be a real Pandoras Box of expenses if you dont understand what it entails.

Think of it this way: building a pier isnt like assembling IKEA furniture. Its a construction project, often over water. This requires specialized equipment. Were talking barges, pile drivers, maybe even underwater welding gear. The cost of renting or operating this equipment can be significant, and that cost is inevitably passed on to you. Dont be afraid to ask for a breakdown. What specific equipment is needed, and what portion of the fee covers its use? A reputable contractor will be transparent about these charges.

Then theres the dreaded "P" word: Permitting. Building on or near waterways is heavily regulated, and rightly so. Environmental concerns, navigational safety, and property rights all come into play. Securing the necessary permits from local, state, and even federal agencies can be a complex and time-consuming process. The fees associated with these permits can vary wildly depending on the scope of the project and the location. A contractor who is experienced in pier construction will not only know which permits are required but should also be able to provide a realistic estimate of the associated costs.

The key takeaway here is to not let "Equipment and Permitting Fees" be a vague, catch-all phrase. Ask questions. Demand clarification. Understand exactly what youre paying for. A detailed quote gives you the power to compare bids accurately and avoids unpleasant surprises down the line. After all, you want to enjoy your new pier, not be burdened by unexpected expenses. A little due diligence upfront can save you a lot of headaches, and money, in the long run.







# **Risk Management and Mitigation Strategies in Project Logistics**

## Warranty and Guarantee Details: Protecting Your Investment

When you're staring at a pier installation quote, it can feel like deciphering a foreign language. Amidst the numbers and technical jargon, it's easy to overlook a critical section: the warranty and guarantee details. But trust me, skipping over this part is like buying a car without knowing if the engine's covered. It's this section that safeguards your significant investment.

Think of the warranty as the pier installer's promise. It outlines what they'll cover if something goes wrong after the installation. What kind of issues are covered? Is it just material defects, or does it include labor costs for repairs? How long does the coverage last – is it a year, five years, or even longer? These are crucial questions to ask. A longer warranty period is generally a good sign, indicating the installer's confidence in their work.

The guarantee, on the other hand, often refers to the installer's assurance of the quality of their workmanship. Does the guarantee cover settling issues or other performance-related problems? It's important to understand the difference between a warranty and a guarantee, and to know what specific issues each covers.

Don't hesitate to grill the installer with questions. What are the exclusions to the warranty or guarantee? Are there specific maintenance requirements you need to follow to keep the warranty valid? A reputable installer will be transparent and happy to answer your questions. They should be able to articulate the details in plain language, not just industry-specific terms you can't understand.

Ultimately, understanding the warranty and guarantee details gives you peace of mind. It's your safety net, protecting you from unexpected expenses and headaches down the road. It demonstrates the installer's commitment to quality and their belief in the longevity of their work. So, before you sign on the dotted line, take the time to carefully review this section. It's an investment in your investment, ensuring your pier provides enjoyment for years to come.

# Post-Repair Verification and Long-Term Monitoring for QA/QC

Okay, so youve finally got those pier installation quotes in front of you, and youre wading through the details. Its a lot, right? But before you just pick the cheapest one, lets talk about something super important: how youre actually going to pay for this thing. Understanding the payment schedule and available financing options can make a huge difference in how this whole project impacts your wallet, both now and down the road.


First, the payment schedule. This is basically the contractors roadmap for getting paid. A reputable contractor will rarely, if ever, ask for the entire amount upfront. Instead, theyll break it down into installments, often tied to milestones. For example, you might see an initial deposit to secure the project and cover initial material costs. Then, you might have further payments once the crew is on site, after the piers are installed, and finally, a last payment after the inspection and any cleanup. This protects both you and the contractor. Youre not out all the money if something goes sideways, and the contractor is assured theyll get paid for the work they complete. Pay close attention to these milestones and make sure they are clearly defined in the contract. Dont be afraid to ask questions if anything is unclear.

Now, lets talk financing. Pier installation can be a significant investment, and not everyone has that kind of cash lying around. If thats you, dont panic! Many contractors offer financing options, either directly through them or through partnerships with lending institutions. These options can range from personal loans to home equity lines of credit (HELOCs). Some contractors may even offer installment plans themselves. The key here is to shop around and compare interest rates, terms, and fees. A low initial interest rate might sound appealing, but make sure you understand the long-term implications and whether that rate is fixed or

variable. A HELOC can be a good option if you have equity in your home, but remember that you're putting your home on the line. Carefully consider your budget and ability to repay the loan before committing to any financing option. Ultimately, understanding the payment schedule and exploring all available financing options will help you make an informed decision that fits your financial situation and ensures a smooth pier installation process.

## About Carbon-fiber reinforced polymer

"Carbon fiber" redirects here. For fibers of carbon, see **Carbon fibers**.

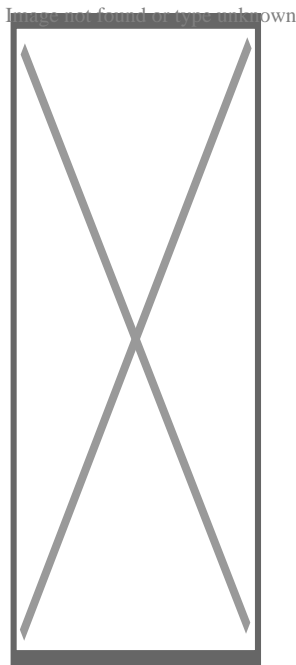

Tail of a **radio-controlled helicopter**, made of CFRP

Carbon fiber-reinforced polymers (**American English**), carbon-fibre-reinforced polymers (**Commonwealth English**), carbon-fiber-reinforced plastics, carbon-fiber reinforced-thermoplastic (CFRP, CRP, CFRTP), also known as carbon fiber, carbon composite, or just carbon, are extremely strong and light **fiber-reinforced plastics** that contain **carbon fibers**. CFRPs can be expensive to produce, but are commonly used wherever high **strength-to-weight ratio** and **stiffness** (rigidity) are required, such as aerospace, superstructures of ships, automotive, civil engineering, sports equipment, and an increasing number of consumer and technical applications.<sup>[1][2][3][4]</sup>

The binding **polymer** is often a **thermoset** resin such as **epoxy**, but other thermoset or **thermoplastic** polymers, such as **polyester**, **vinyl ester**, or **nylon**, are sometimes used.<sup>[4]</sup> The properties of the final CFRP product can be affected by the type of additives introduced to the binding matrix (resin). The most common additive is **silica**, but other



additives such as rubber and **carbon nanotubes** can be used.

Carbon fiber is sometimes referred to as *graphite-reinforced polymer* or *graphite fiber-reinforced polymer* (GFRP is less common, as it clashes with **glass-(fiber)-reinforced polymer**).

## Properties

[edit]

CFRP are **composite materials**. In this case the composite consists of two parts: a matrix and a reinforcement. In CFRP the reinforcement is carbon fiber, which provides its strength. The matrix is usually a thermosetting plastic, such as polyester resin, to bind the reinforcements together.[5] Because CFRPs consist of two distinct elements, the material properties depend on these two elements.

Reinforcement gives CFRPs their strength and rigidity, measured by **stress** and **elastic modulus** respectively. Unlike **isotropic** materials like steel and aluminum, CFRPs have directional strength properties. The properties of a CFRP depend on the layouts of the carbon fiber and the proportion of the carbon fibers relative to the polymer.[6] The two different equations governing the net elastic modulus of composite materials using the properties of the carbon fibers and the polymer matrix can also be applied to carbon fiber reinforced plastics.[7] The **rule of mixtures** for the equal **strain** case gives:

$$E_c = V_m E_m + V_f E_f$$

which is valid for composite materials with the fibers oriented **parallel** to the applied load.

$E_c$  is the total composite modulus,  $V_m$  and  $V_f$  are the fractions of the matrix and fiber respectively in the composite, and  $E_m$  and  $E_f$  are the elastic moduli of the matrix and fibers respectively.[7] The other extreme case of the elastic modulus of the composite with the fibers oriented transverse to the applied load can be found using the inverse rule of mixtures for the equal stress case:[7]

$$E_c = \left( \frac{V_m E_m + V_f E_f}{V_m + V_f} \right)^{-1}$$

The above equations give an upper and lower bound on the Young's modulus for CFRP and there are many other factors that influence the true value.

The fracture toughness of carbon fiber reinforced plastics is governed by multiple mechanisms:

- Debonding between the carbon fiber and polymer matrix.
- Fiber pull-out.

- Delamination between the CFRP sheets.[8]

Typical epoxy-based CFRPs exhibit virtually no plasticity, with less than 0.5% strain to failure. Although CFRPs with epoxy have high strength and elastic modulus, the brittle fracture mechanics presents unique challenges to engineers in failure detection since failure occurs catastrophically.[8] As such, recent efforts to toughen CFRPs include modifying the existing epoxy material and finding alternative polymer matrix. One such material with high promise is **PEEK**, which exhibits an order of magnitude greater toughness with similar elastic modulus and tensile strength.[8] However, PEEK is much more difficult to process and more expensive.[8]

Despite their high initial strength-to-weight ratios, a design limitation of CFRPs are their lack of a definable **fatigue limit**. This means, theoretically, that stress cycle failure cannot be ruled out. While steel and many other structural metals and alloys do have estimable fatigue or endurance limits, the complex failure modes of composites mean that the fatigue failure properties of CFRPs are difficult to predict and design against; however emerging research has shed light on the effects of low velocity impacts on composites.[9] Low velocity impacts can make carbon fiber polymers susceptible to damage.[9][10][11] As a result, when using CFRPs for critical cyclic-loading applications, engineers may need to design in considerable strength safety margins to provide suitable component reliability over its service life.

Environmental effects such as temperature and **humidity** can have profound effects on the polymer-based composites, including most CFRPs. While CFRPs demonstrate excellent corrosion resistance, the effect of moisture at wide ranges of temperatures can lead to degradation of the mechanical properties of CFRPs, particularly at the matrix-fiber interface.[12] While the carbon fibers themselves are not affected by the moisture diffusing into the material, the moisture plasticizes the polymer matrix.[8] This leads to significant changes in properties that are dominantly influenced by the matrix in CFRPs such as compressive, interlaminar shear, and impact properties.[13] The epoxy matrix used for engine fan blades is designed to be impervious against jet fuel, lubrication, and rain water, and external paint on the composites parts is applied to minimize damage from ultraviolet light.[8][14]

Carbon fibers can cause **galvanic corrosion** when CFRP parts are attached to aluminum or mild steel but not to stainless steel or titanium.[15]


CFRPs are very hard to machine, and cause significant tool wear. The tool wear in CFRP machining is dependent on the fiber orientation and machining condition of the cutting process. To reduce tool wear various types of coated tools are used in machining CFRP and CFRP-metal stack.[1]

## Manufacturing

[edit]



This section **needs additional citations for verification**. Please help **improve this article** by **adding citations to reliable sources** in this section. Unsourced material may be challenged and removed. (March 2020) (***Learn how and when to remove this message***)

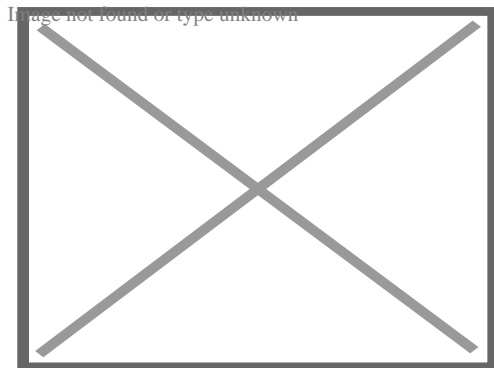

Carbon fiber reinforced polymer

The primary element of CFRPs is a **carbon filament**; this is produced from a precursor **polymer** such as **polyacrylonitrile** (PAN), **rayon**, or petroleum **pitch**. For synthetic polymers such as PAN or rayon, the precursor is first **spun** into filament yarns, using chemical and mechanical processes to initially align the polymer chains in a way to enhance the final physical properties of the completed carbon fiber. Precursor compositions and mechanical processes used during spinning filament yarns may vary among manufacturers. After drawing or spinning, the polymer filament yarns are then heated to drive off non-carbon atoms (**carbonization**), producing the final carbon fiber. The carbon fibers filament yarns may be further treated to improve handling qualities, then wound onto **bobbins**.<sup>[16]</sup> From these fibers, a unidirectional sheet is created. These sheets are layered onto each other in a quasi-isotropic layup, e.g. 0°, +60°, or ?60° relative to each other.

From the elementary fiber, a bidirectional woven sheet can be created, i.e. a **twill** with a 2/2 weave. The process by which most CFRPs are made varies, depending on the piece being created, the finish (outside gloss) required, and how many of the piece will be produced. In addition, the choice of matrix can have a profound effect on the properties of the finished composite.<sup>[17]</sup>

Many CFRP parts are created with a single layer of carbon fabric that is backed with fiberglass.<sup>[18]</sup> A tool called a chopper gun is used to quickly create these composite parts. Once a thin shell is created out of carbon fiber, the chopper gun cuts rolls of fiberglass into short lengths and sprays resin at the same time, so that the fiberglass and resin are mixed on the spot.<sup>[19]</sup> The resin is either external mix, wherein the hardener and resin are sprayed separately, or internal mixed, which requires cleaning after every use. Manufacturing methods may include the following:

# Molding

[[edit](#)]

One method of producing CFRP parts is by layering sheets of carbon fiber cloth into a **mold** in the shape of the final product. The alignment and weave of the cloth fibers is chosen to optimize the strength and stiffness properties of the resulting material. The mold is then filled with **epoxy** and is heated or air-cured. The resulting part is very corrosion-resistant, stiff, and strong for its weight. Parts used in less critical areas are manufactured by draping cloth over a mold, with epoxy either pre-impregnated into the fibers (also known as **pre-preg**) or "painted" over it. High-performance parts using single molds are often vacuum-bagged and/or **autoclave**-cured, because even small air bubbles in the material will reduce strength. An alternative to the autoclave method is to use internal pressure via inflatable air bladders or **EPS foam** inside the non-cured laid-up carbon fiber.

## Vacuum bagging

[[edit](#)]

For simple pieces of which relatively few copies are needed (one or two per day), a **vacuum bag** can be used. A fiberglass, carbon fiber, or aluminum mold is polished and waxed, and has a **release agent** applied before the fabric and resin are applied, and the vacuum is pulled and set aside to allow the piece to cure (harden). There are three ways to apply the resin to the fabric in a vacuum mold.

The first method is manual and called a wet layup, where the two-part resin is mixed and applied before being laid in the mold and placed in the bag. The other one is done by infusion, where the dry fabric and mold are placed inside the bag while the vacuum pulls the resin through a small tube into the bag, then through a tube with holes or something similar to evenly spread the resin throughout the fabric. Wire loom works perfectly for a tube that requires holes inside the bag. Both of these methods of applying resin require hand work to spread the resin evenly for a glossy finish with very small pin-holes.

A third method of constructing composite materials is known as a dry layup. Here, the carbon fiber material is already impregnated with resin (pre-preg) and is applied to the mold in a similar fashion to adhesive film. The assembly is then placed in a vacuum to cure. The dry layup method has the least amount of resin waste and can achieve lighter constructions than wet layup. Also, because larger amounts of resin are more difficult to bleed out with wet layup methods, pre-preg parts generally have fewer pinholes. Pinhole elimination with



minimal resin amounts generally require the use of **autoclave** pressures to purge the residual gases out.

## Compression molding

[[edit](#)]

A quicker method uses a **compression mold**, also commonly known as carbon fiber forging. This is a two (male and female), or multi-piece mold, usually made out of aluminum or steel and more recently 3D printed plastic. The mold components are pressed together with the fabric and resin loaded into the inner cavity that ultimately becomes the desired component. The benefit is the speed of the entire process. Some car manufacturers, such as BMW, claimed to be able to cycle a new part every 80 seconds. However, this technique has a very high initial cost since the molds require CNC machining of very high precision.

## Filament winding

[[edit](#)]

For difficult or convoluted shapes, a **filament winder** can be used to make CFRP parts by winding filaments around a mandrel or a core.

## Cutting

[[edit](#)]

Carbon fiber-reinforced **pre-pregs** and dry carbon fiber textiles require precise cutting methods to maintain material integrity and reduce defects such as fiber pull-out, **delamination** and fraying of the cutting edge. **CNC digital cutting systems** equipped with drag and oscillating are often used to cut carbon fiber pre-pregs, and rotating knives are commonly used to process carbon fiber fabrics. **Ultrasonic** cutting is another method to cut CFRP pre-pregs and is particularly effective in reducing delamination by minimizing **mechanical stress** during the cutting process. **Waterjet cutting** can be the preferred method for thicker and multilayered polymer **composites**.<sup>[20]</sup>


### Applications

[[edit](#)]

Applications for CFRPs include the following:

## Aerospace engineering

[[edit](#)]

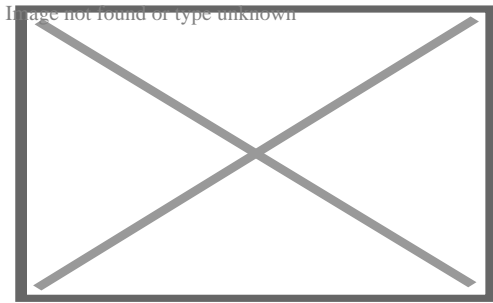

An **Airbus A350** with carbon fiber themed **livery**. Composite materials are used extensively throughout the A350.

The **Airbus A350 XWB** is 53% CFRP[21] including wing spars and fuselage components, overtaking the **Boeing 787 Dreamliner**, for the aircraft with the highest weight ratio for CFRP at 50%.[22] It was one of the first commercial aircraft to have wing spars made from composites. The **Airbus A380** was one of the first commercial airliners to have a central wing-box made of CFRP and the first with a smoothly contoured wing cross-section instead of partitioning it span-wise into sections. This flowing, continuous cross section optimises aerodynamic efficiency.[[citation needed](#)] Moreover, the trailing edge, along with the rear bulkhead, **empennage**, and un-pressurised fuselage are made of CFRP.[23]

However, delays have pushed order delivery dates back because of manufacturing problems. Many aircraft that use CFRPs have experienced delays with delivery dates due to the relatively new processes used to make CFRP components, whereas metallic structures are better understood. A recurrent problem is the monitoring of structural ageing, for which new methods are required, due to the unusual multi-material and anisotropic[24][25][26] nature of CFRPs.[27]

In 1968 a *Hyfil* carbon-fiber fan assembly was in service on the **Rolls-Royce Conways** of the **Vickers VC10s** operated by **BOAC**.[28]


Specialist aircraft designers and manufacturers **Scaled Composites** have made extensive use of CFRPs throughout their design range, including the first private crewed spacecraft **Spaceship One**. CFRPs are widely used in **micro air vehicles** (MAVs) because of their high strength-to-weight ratio.

Airbus then moved to adopt CFRTP, because it can be reshaped and reprocessed after forming, can be manufactured faster, has higher impact resistance, is recyclable and remoldable, and has lower processing costs.[29]

## Automotive engineering


[edit]

Image not found or type unknown




**Citroën SM** that won  
1971 **Rally of  
Morocco** with carbon  
fiber wheels

Image not found or type unknown



1996 **McLaren F1** –  
first carbon fiber body  
shell

Image not found or type unknown



McLaren MP4 (MP4/1),  
first carbon fiber F1 car

CFRPs are extensively used in high-end automobile racing.[30] The high cost of carbon fiber is mitigated by the material's unsurpassed strength-to-weight ratio, and low weight is essential for high-performance automobile racing. Race-car manufacturers have also developed methods to give carbon fiber pieces strength in a certain direction, making it strong in a load-bearing direction, but weak in directions where little or no load would be placed on the member. Conversely, manufacturers developed omnidirectional carbon fiber

weaves that apply strength in all directions. This type of carbon fiber assembly is most widely used in the "safety cell" **monocoque** chassis assembly of high-performance race-cars. The first carbon fiber monocoque chassis was introduced in **Formula One** by **McLaren** in the 1981 season. It was designed by **John Barnard** and was widely copied in the following seasons by other F1 teams due to the extra rigidity provided to the chassis of the cars.[31]

Many **supercars** over the past few decades have incorporated CFRPs extensively in their manufacture, using it for their monocoque chassis as well as other components.[32] As far back as 1971, the **Citroën SM** offered optional lightweight carbon fiber wheels.[33][34]

Use of the material has been more readily adopted by low-volume manufacturers who used it primarily for creating body-panels for some of their high-end cars due to its increased strength and decreased weight compared with the **glass-reinforced polymer** they used for the majority of their products.

## Civil engineering

[edit]

Further information: **Structural applications of FRP**

CFRPs have become a notable material in **structural engineering** applications. Studied in an academic context as to their potential benefits in construction, CFRPs have also proved themselves cost-effective in a number of field applications strengthening concrete, masonry, steel, cast iron, and timber structures. Their use in industry can be either for **retrofitting** to strengthen an existing structure or as an alternative reinforcing (or prestressing) material instead of steel from the outset of a project.

Retrofitting has become the increasingly dominant use of the material in civil engineering, and applications include increasing the load capacity of old structures (such as bridges, beams, ceilings, columns and walls) that were designed to tolerate far lower service loads than they are experiencing today, seismic retrofitting, and repair of damaged structures. Retrofitting is popular in many instances as the cost of replacing the deficient structure can greatly exceed the cost of strengthening using CFRP.[35]

Applied to reinforced concrete structures for flexure, the use of CFRPs typically has a large impact on strength (doubling or more the strength of the section is not uncommon), but only moderately increases **stiffness** (as little as 10%). This is because the material used in such applications is typically very strong (e.g., 3 GPa ultimate **tensile strength**, more than 10 times mild steel) but not particularly stiff (150 to 250 GPa elastic modulus, a little less than steel, is typical). As a consequence, only small cross-sectional areas of the material are used. Small areas of very high strength but moderate stiffness material will significantly



increase strength, but not stiffness.

CFRPs can also be used to enhance **shear strength** of reinforced concrete by wrapping fabrics or fibers around the section to be strengthened. Wrapping around sections (such as bridge or building columns) can also enhance the **ductility** of the section, greatly increasing the resistance to collapse under dynamic loading. Such 'seismic retrofit' is the major application in earthquake-prone areas, since it is much more economic than alternative methods.

If a column is circular (or nearly so) an increase in axial capacity is also achieved by wrapping. In this application, the confinement of the CFRP wrap enhances the **compressive strength** of the concrete. However, although large increases are achieved in the ultimate collapse load, the concrete will crack at only slightly enhanced load, meaning that this application is only occasionally used. Specialist ultra-high modulus CFRP (with tensile modulus of 420 GPa or more) is one of the few practical methods of strengthening **cast iron** beams. In typical use, it is bonded to the tensile flange of the section, both increasing the stiffness of the section and lowering the **neutral axis**, thus greatly reducing the maximum tensile stress in the cast iron.

In the United States, **prestressed concrete** cylinder pipes (PCCP) account for a vast majority of water transmission mains. Due to their large diameters, failures of PCCP are usually catastrophic and affect large populations. Approximately 19,000 miles (31,000 km) of PCCP were installed between 1940 and 2006. **Corrosion** in the form of hydrogen embrittlement has been blamed for the gradual deterioration of the prestressing wires in many PCCP lines. Over the past decade, CFRPs have been used to internally line PCCP, resulting in a fully structural strengthening system. Inside a PCCP line, the CFRP liner acts as a barrier that controls the level of strain experienced by the steel cylinder in the host pipe. The composite liner enables the steel cylinder to perform within its elastic range, to ensure the pipeline's long-term performance is maintained. CFRP liner designs are based on strain compatibility between the liner and host pipe.[36]

CFRPs are more costly materials than commonly used their counterparts in the construction industry, **glass fiber-reinforced polymers** (GFRPs) and **aramid** fiber-reinforced polymers (AFRPs), though CFRPs are, in general, regarded as having superior properties. Much research continues to be done on using CFRPs both for retrofitting and as an alternative to steel as reinforcing or prestressing materials. Cost remains an issue and long-term **durability** questions still remain. Some are concerned about the **brittle** nature of CFRPs, in contrast to the ductility of steel. Though design codes have been drawn up by institutions such as the **American Concrete Institute**, there remains some hesitation among the engineering community about implementing these alternative materials. In part, this is due to a lack of standardization and the proprietary nature of the fiber and resin combinations on the market.


# Carbon-fiber microelectrodes

[[edit](#)]

Carbon fibers are used for fabrication of carbon-fiber **microelectrodes**. In this application typically a single carbon fiber with diameter of 5–7  $\mu\text{m}$  is sealed in a glass capillary.<sup>[37]</sup> At the tip the capillary is either sealed with epoxy and polished to make carbon-fiber disk microelectrode or the fiber is cut to a length of 75–150  $\mu\text{m}$  to make carbon-fiber cylinder electrode. Carbon-fiber microelectrodes are used either in **amperometry** or **fast-scan cyclic voltammetry** for detection of biochemical signalling.

## Sports goods

[[edit](#)]

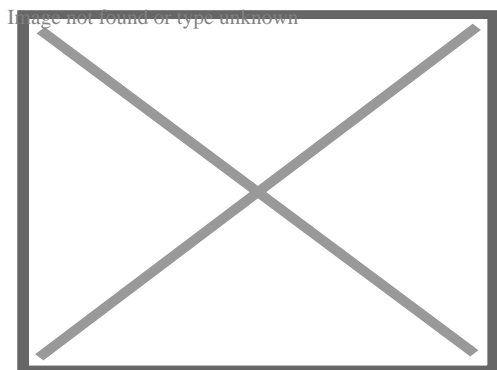

A carbon-fiber and **Kevlar** canoe (Placid Boatworks Rapidfire at the **Adirondack Canoe Classic**)

CFRPs are now widely used in sports equipment such as in squash, tennis, and badminton racquets, **sport kite** spars, high-quality arrow shafts, hockey sticks, fishing rods, **surfboards**, high end swim fins, and rowing **shells**. Amputee athletes such as **Jonnie Peacock** use carbon fiber blades for running. It is used as a shank plate in some **basketball** sneakers to keep the foot stable, usually running the length of the shoe just above the sole and left exposed in some areas, usually in the arch.

Controversially, in 2006, cricket bats with a thin carbon-fiber layer on the back were introduced and used in competitive matches by high-profile players including **Ricky Ponting** and **Michael Hussey**. The carbon fiber was claimed to merely increase the durability of the bats, but it was banned from all first-class matches by the **ICC** in 2007.<sup>[38]</sup>

A CFRP **bicycle frame** weighs less than one of steel, aluminum, or **titanium** having the same strength. The type and orientation of the carbon-fiber weave can be designed to maximize stiffness in required directions. Frames can be tuned to address different riding styles: sprint events require stiffer frames while endurance events may require more flexible frames for rider comfort over longer periods.[39] The variety of shapes it can be built into has further increased stiffness and also allowed **aerodynamic** tube sections. CFRP **forks** including suspension fork crowns and steerers, **handlebars**, **seatposts**, and **crank arms** are becoming more common on medium as well as higher-priced bicycles. CFRP **rim**s remain expensive but their stability compared to aluminium reduces the need to re-true a wheel and the reduced mass reduces the **moment of inertia** of the wheel. CFRP spokes are rare and most carbon wheelsets retain traditional stainless steel spokes. CFRPs also appear increasingly in other components such as derailleur parts, brake and shifter levers and bodies, cassette sprocket carriers, suspension linkages, disc brake rotors, pedals, shoe soles, and saddle rails. Although strong and light, impact, over-torquing, or improper installation of CFRP components has resulted in cracking and failures, which may be difficult or impossible to repair.[40][41]

## Other applications


[**edit**]

**Dunlop "Max-Grip" carbon fiber guitar picks. Sizes 1mm and Jazz III.**

Image not found or type unknown

**Dunlop "Max-Grip" carbon fiber guitar picks. Sizes 1mm and Jazz III.**

The fire resistance of polymers and thermo-set composites is significantly improved if a thin layer of carbon fibers is moulded near the surface because a dense, compact layer of carbon fibers efficiently reflects heat.[42]

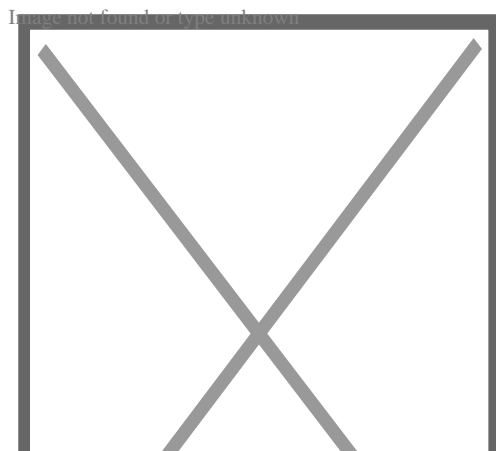

Strandberg Boden Plini **neck-thru** & **bolt on** versions that both utilize carbon fiber reinforcement strips to maintain rigidity.

CFRPs are being used in an increasing number of high-end products that require stiffness and low weight, these include:

- Musical instruments, including violin bows; guitar picks, guitar necks (fitted with carbon fiber rods), **pickguards**/scratchplates; drum shells; bagpipe chanters; piano actions; and entire musical instruments such as carbon fiber cellos, violas, and violins, acoustic guitars and ukuleles; also, audio components such as turntables and loudspeakers.
- Firearms use it to replace certain metal, wood, and fiberglass components but many of the internal parts are still limited to metal alloys as current reinforced plastics are unsuitable.
- High-performance drone bodies and other radio-controlled vehicle and aircraft components such as helicopter rotor blades.
- Lightweight poles such as: tripod legs, tent poles, fishing rods, billiards cues, walking sticks, and high-reach poles such as for window cleaning.
- Dentistry, **carbon fiber posts** are used in restoring root canal treated teeth.
- Railed train **bogies** for passenger service. This reduces the weight by up to 50% compared to metal bogies, which contributes to energy savings.[43]
- Laptop shells and other high performance cases.
- Carbon woven fabrics.[44][45]
- Archery: carbon fiber arrows and bolts, **stock** (for crossbows) and **riser** (for vertical bows), and rail.
- As a filament for the 3D fused deposition modeling printing process,[46] carbon fiber-reinforced plastic (polyamide-carbon filament) is used for the production of sturdy but lightweight tools and parts due to its high strength and tear length.[47]
- District heating pipe rehabilitation, using a **CIPP** method.

## Disposal and recycling

[edit]



This section **does not cite any sources**. Please help **improve this section** by **adding citations to reliable sources**. Unsourced material may be challenged and **removed**. (June 2012) (***Learn how and when to remove this message***)

The key aspect of recycling fiber-reinforced polymers is preserving their mechanical properties while successfully recovering both the **thermoplastic** matrix and the reinforcing fibers. CFRPs have a long service lifetime when protected from the sun. When it is time to decommission CFRPs, they cannot be melted down in air like many metals. When free of vinyl (PVC or **polyvinyl chloride**) and other halogenated polymers, CFRPs recycling processes can be categorized into four main approaches: mechanical, **thermal**, chemical, and biological. Each method offers distinct advantages in terms of material or **energy recovery**, contributing to **sustainability** efforts in composite waste management.



Process	Matrix recovery	Fiber recovery	Degradation of Mechanical Properties	Advantages/Drawbacks
Mechanical	X	X	X	+No use of hazardous chemical substances +No gas emissions +Low-cost energy needed +Big volumes can be recycled  -Poor bonding between fiber/matrix - Fibers can damage the equipment  +Long clean fibers +Retention of mechanical properties +Sometimes there is high recovery of the matrix
Chemical		X		-Expensive equipment -Possible use of hazardous solvent  +Fiber length retention +No use of hazardous chemical substances +better mechanical properties than mechanical approach +Matrix used to produce energy
Thermal		X	X	-Recovered fiber properties highly influenced by process parameters -some processes have no recovery of matrix material

## Mechanical Recycling

[[edit](#)]

The mechanical process primarily involves **grinding**, which breaks down composite materials into pulverulent charges and fibrous reinforcements. This method is focused on both the thermoplastic and filler material recovery; however, this process shortens the fibers dramatically. Just as with **downcycled** paper, the shortened fibers cause the recycled material to be weaker than the original material. There are still many industrial applications that do not need the strength of full-length carbon fiber reinforcement. For example, chopped reclaimed carbon fiber can be used in consumer electronics, such as laptops. It provides excellent reinforcement of the polymers used even if it lacks the strength-to-weight ratio of an aerospace component.[\[48\]](#)

## Electro fragmentation

[[edit](#)]

This method consists in shredding CFRP by pulsed **electrical discharges**. Initially developed to extract crystals and precious stones from mining rocks, it is now expected to be developed for composites. The material is placed in a vessel containing water and two **electrodes**. The high voltage electrical pulse generated between the electrodes (50-200 kV) fragments the material into smaller pieces.[\[49\]](#) The inconvenient of this technique is that the energy consumed is 2.6 times the one of a mechanical route making it not economically competitive in terms of energy saving and needs further investigation.

## Thermal Recycling

[[edit](#)]

Thermal processes include several techniques such as **incineration**, **thermolysis**, **pyrolysis**, **gasification**, fluidized bed processing, and **cement plant** utilization. This processes imply the recovery of the fibers by the removal of the **resin** by volatilizing it, leading to by-products such as gases, liquids or inorganic matter.[\[50\]](#)

### Oxidation in fluidized bed

[[edit](#)]

This technique consists in exposing the composite to a hot and **oxygen-rich** flow, in which it is combusted (450–550 °C, 840–1,020 °F) . The working temperature is selected in function of the matrix to be **decomposed**, to limit damages of the fibers. After a shredding step to 6-20 mm size, the composite is introduced into a bed of **silica sand**, on a metallic mesh, in which the resin will be decomposed into oxidized molecules and fiber filaments. These components will be carried up with the air stream while heavier particles will sink in the bed. This last point is a great advantage for contaminated end-of-life products, with painted surfaces, **foam cores** or metal insert. A **cyclone** enables the recovery of fibers of length ranging between 5 and 10 mm and with very little contamination . The matrix is fully oxidized in a second burner operating at approximately 1,000 °C (1,850 °F) leading to **energy recovery** and a clean flue gas.[\[51\]](#)

# Chemical Recycling

[edit]

The chemical recycling of CFRPs involves using a reactive **solvent** at relatively low temperatures (below 350°C) to break down the resin while leaving the fibers intact for reuse. The solvent degrades the composite matrix into smaller molecular fragments (**oligomer**), and depending on the chosen solvent system, various processing parameters such as temperature, pressure, and **catalysts** can be adjusted to optimize the process. The solvent, often combined with **co-solvents** or catalysts, penetrates the composite and **breaks specific chemical bonds**, resulting in recovered **monomers** from the resin and clean, long fibers with preserved mechanical properties. The required temperature and pressure depend on the type of resin, with **epoxy resins** generally needing higher temperatures than polyester resins. Among the different reactive mediums studied, water is the most commonly used due to its environmental benefits. When combined with **alkaline** catalysts, it effectively degrades many resins, while **acidic** catalysts are used for more resistant polymers. Other solvents, such as **ethanol**, **acetone**, and their mixtures, have also been explored for this process.

Despite its advantages, this method has some limitations. It requires specialized equipment capable of handling **corrosive** solvents, hazardous chemicals, and high temperatures or pressures, especially when operating under **supercritical** conditions. While extensively researched at the laboratory scale, industrial adoption remains limited, with the technology currently reaching a **Technology Readiness Level** (TRL) of 4 for carbon fiber recycling.[52]

## Dissolution Process

[edit]

The dissolution process is a method used to recover both the polymer matrix and fibers from thermoplastic composites without breaking **chemical bonds**. Unlike **solvolysis**, which involves the **chemical degradation** of the polymer, dissolution simply dissolves the polymer chains into a solvent, allowing for material recovery in its original form. An energy analysis of the process indicated that dissolution followed by **evaporation** was more energy-efficient than **precipitation**. Additionally, avoiding precipitation helped minimize polymer loss, improving overall material recovery efficiency. This method offers a promising approach for sustainable recycling of thermoplastic composites.[53]

# Biological Recycling

[[edit](#)]

The biological process, though still under development, focuses on **biodegradation** and **composting**. This method holds promise for bio-based and agro-composites, aiming to create an environmentally friendly end-of-life solution for these materials. As research advances, biological recycling may offer an effective means of reducing plastic composite waste in a sustainable manner.[\[54\]](#)

## Carbon nanotube reinforced polymer (CNRP)

[[edit](#)]

In 2009, **Zyvex Technologies** introduced carbon nanotube-reinforced epoxy and carbon **pre-pregs**.[\[55\]](#) **Carbon nanotube** reinforced polymer (CNRP) is several times stronger and tougher than typical CFRPs and is used in the **Lockheed Martin F-35 Lightning II** as a structural material for aircraft.[\[56\]](#) CNRP still uses carbon fiber as the primary reinforcement,[\[57\]](#) but the binding matrix is a carbon nanotube-filled epoxy.[\[58\]](#)

## See also

[[edit](#)]

- **Carbon fibers** – Material fibers about 5–10 μm in diameter composed of carbon
- **Composite repair** – Composite repair patch preparation and application
- **Mechanics of Oscar Pistorius's running blades** – Blades used by South African Paralympic runner Oscar Pistorius
- **Reinforced carbon–carbon** – Graphite-based composite material
- **Forged carbon fiber**
- **Carbon-ceramic**
- **Carbotanium**

## References

[[edit](#)]

- <sup>^</sup> **a b** Nguyen, Dinh; Abdullah, Mohammad Sayem Bin; Khawarizmi, Ryan; Kim, Dave; Kwon, Patrick (2020). "The effect of fiber orientation on tool wear in edge-trimming of carbon fiber reinforced plastics (CFRP) laminates". *Wear*. 450–451. Elsevier B.V: 203213. doi:10.1016/j.wear.2020.203213. ISSN 0043-1648. S2CID 214420968.
- <sup>^</sup> Geier, Norbert; Davim, J. Paulo; Szalay, Tibor (1 October 2019). "**Advanced cutting tools and technologies for drilling carbon fibre reinforced polymer**

- (CFRP) composites: A review".** Composites Part A: Applied Science and Manufacturing. **125**: 105552. doi:10.1016/j.compositesa.2019.105552. hdl:10773/36722.
3. ^ Dransfield, Kimberley; Baillie, Caroline; Mai, Yiu-Wing (1 January 1994). **"Improving the delamination resistance of CFRP by stitching—a review".** Composites Science and Technology. **50** (3): 305–317. doi:10.1016/0266-3538(94)90019-1.
  4. ^ **a b** Kudo, Natsuko; Fujita, Ryohei; Oya, Yutaka; Sakai, Takenobu; Nagano, Hosei; Koyanagi, Jun (30 June 2023). **"Identification of invisible fatigue damage of thermosetting epoxy resin by non-destructive thermal measurement using entropy generation".** Advanced Composite Materials. **33** (2): 233–249. doi:10.1080/09243046.2023.2230687. ISSN 0924-3046.
  5. ^ Kopeliovich, Dmitri. **"Carbon Fiber Reinforced Polymer Composites". Archived** from the original on 14 May 2012.. substech.com
  6. ^ Corum, J. M.; Battiste, R. L.; Liu, K. C; Ruggles, M. B. (February 2000). **"Basic Properties of Reference Crossply Carbon-Fiber Composite, ORNL/TM-2000/29, Pub57518"** (PDF). Oak Ridge National Laboratory. **Archived** (PDF) from the original on 27 December 2016.
  7. ^ **a b c** Courtney, Thomas (2000). Mechanical Behavior of Materials. United States of America: Waveland Press, Inc. pp. 247–249. ISBN 1-57766-425-6.
  8. ^ **a b c d e f** Chawla, Krishan (2013). Composite Materials. United States of America: Springer. ISBN 978-0-387-74364-6.
  9. ^ **a b** Liao, Binbin; Wang, Panding; Zheng, Jinyang; Cao, Xiaofei; Li, Ying; Ma, Quanjin; Tao, Ran; Fang, Daining (1 September 2020). **"Effect of double impact positions on the low velocity impact behaviors and damage interference mechanism for composite laminates".** Composites Part A: Applied Science and Manufacturing. **136**: 105964. doi:10.1016/j.compositesa.2020.105964. ISSN 1359-835X.
  10. ^ Ma, Binlin; Cao, Xiaofei; Feng, Yu; Song, Yujian; Yang, Fei; Li, Ying; Zhang, Deyue; Wang, Yipeng; He, Yuting (15 February 2024). **"A comparative study on the low velocity impact behavior of UD, woven, and hybrid UD/woven FRP composite laminates".** Composites Part B: Engineering. **271**: 111133. doi:10.1016/j.compositesb.2023.111133. ISSN 1359-8368.
  11. ^ Aminakbari, Nariman; Kabir, Mohammad Zaman; Rahai, Alireza; Hosseinnia, Amirali (1 January 2024). **"Experimental and Numerical Evaluation of GFRP-Reinforced Concrete Beams Under Consecutive Low-Velocity Impact Loading".** International Journal of Civil Engineering. **22** (1): 145–156. Bibcode: 2024IJCE...22..145A. doi:10.1007/s40999-023-00883-9. ISSN 2383-3874.
  12. ^ Ray, B. C. (1 June 2006). "Temperature effect during humid ageing on interfaces of glass and carbon fibers reinforced epoxy composites". Journal of Colloid and Interface Science. **298** (1): 111–117. Bibcode:2006JCIS..298..111R. doi:10.1016/j.jcis.2005.12.023. PMID 16386268.

13. ^ Almudaihesh, Faisel; Holford, Karen; Pullin, Rhys; Eaton, Mark (1 February 2020). **"The influence of water absorption on unidirectional and 2D woven CFRP composites and their mechanical performance"**. *Composites Part B: Engineering*. **182**: 107626. doi:[10.1016/j.compositesb.2019.107626](https://doi.org/10.1016/j.compositesb.2019.107626). ISSN 1359-8368. S2CID 212969984. Archived from the original on 1 October 2021. Retrieved 1 October 2021.
14. ^ Guzman, Enrique; Cugnoni, Joël; Gmür, Thomas (May 2014). "Multi-factorial models of a carbon fibre/epoxy composite subjected to accelerated environmental ageing". *Composite Structures*. **111**: 179–192. doi:[10.1016/j.compstruct.2013.12.028](https://doi.org/10.1016/j.compstruct.2013.12.028).
15. ^ Yari, Mehdi (24 March 2021). **"Galvanic Corrosion of Metals Connected to Carbon Fiber Reinforced Polymers"**. corrosionpedia.com. Archived from the original on 24 June 2021. Retrieved 21 June 2021.
16. ^ **"How is it Made"**. Zoltek. Archived from the original on 19 March 2015. Retrieved 26 March 2015.
17. ^ Syed Mobin, Syed Mobin; Azgerpasha, Shaik (2019). **"Tensile Testing on Composite Materials (CFRP) with Adhesive"** (PDF). *International Journal of Emerging Science and Engineering*. **5** (12): 6. Archived (PDF) from the original on 21 August 2022. Retrieved 21 August 2022 – via IJES.
18. ^ Glass Companies, Molded Fiber (2018), **Technical Design Guide for FRP Composite Products and Parts** (PDF), vol. 1, p. 25, archived from the original (PDF) on 21 August 2022, retrieved 21 August 2022
19. ^ Unknown, Chris (22 January 2020). **"Composite Manufacturing Methods"**. Explore Composites!. Archived from the original on 21 August 2022. Retrieved 21 August 2022.
20. ^ **"Cutting of Fiber-Reinforced Composites: Overview"**. Sollex. 6 March 2025. Retrieved 31 March 2025.
21. ^ **"Taking the lead: A350XWB presentation"** (PDF). EADS. December 2006. Archived from the original on 27 March 2009.
22. ^ **"AERO – Boeing 787 from the Ground Up"**. Boeing. 2006. Archived from the original on 21 February 2015. Retrieved 7 February 2015.
23. ^ Pora, Jérôme (2001). **"Composite Materials in the Airbus A380 – From History to Future"** (PDF). Airbus. Archived (PDF) from the original on 6 February 2015. Retrieved 7 February 2015.
24. ^ Machado, Miguel A.; Antin, Kim-Niklas; Rosado, Luís S.; Vilaça, Pedro; Santos, Telmo G. (November 2021). **"High-speed inspection of delamination defects in unidirectional CFRP by non-contact eddy current testing"**. *Composites Part B: Engineering*. **224**: 109167. doi:[10.1016/j.compositesb.2021.109167](https://doi.org/10.1016/j.compositesb.2021.109167).
25. ^ Machado, Miguel A.; Antin, Kim-Niklas; Rosado, Luís S.; Vilaça, Pedro; Santos, Telmo G. (July 2019). **"Contactless high-speed eddy current inspection of unidirectional carbon fiber reinforced polymer"**. *Composites Part B: Engineering*. **168**: 226–235. doi:[10.1016/j.compositesb.2018.12.021](https://doi.org/10.1016/j.compositesb.2018.12.021).
26. ^ Antin, Kim-Niklas; Machado, Miguel A.; Santos, Telmo G.; Vilaça, Pedro (March 2019). **"Evaluation of Different Non-destructive Testing Methods to Detect**



- Imperfections in Unidirectional Carbon Fiber Composite Ropes".** Journal of Nondestructive Evaluation. **38** (1). doi:10.1007/s10921-019-0564-y. ISSN 0195-9298.
27. ^ Guzman, Enrique; Gmür, Thomas (dir.) (2014). **A Novel Structural Health Monitoring Method for Full-Scale CFRP Structures** (PDF) (Thesis). EPFL PhD thesis. doi:10.5075/epfl-thesis-6422. Archived (PDF) from the original on 25 June 2016.
  28. ^ **"Engines"**. Flight International. 26 September 1968. Archived from the original on 14 August 2014.
  29. ^ Szondy, David (28 March 2025). **"Airbus previews next-gen airliner with bird-inspired wings"**. New Atlas. Retrieved 7 April 2025.
  30. ^ **"Red Bull's How To Make An F1 Car Series Explains Carbon Fiber Use: Video"**. motorauthority. 25 September 2013. Archived from the original on 29 September 2013. Retrieved 11 October 2013.
  31. ^ **Henry, Alan** (1999). **McLaren: Formula 1 Racing Team**. Haynes. ISBN 1-85960-425-0.
  32. ^ Howard, Bill (30 July 2013). **"BMW i3: Cheap, mass-produced carbon fiber cars finally come of age"**. Extreme Tech. Archived from the original on 31 July 2015. Retrieved 31 July 2015.
  33. ^ Petrány, Máté (17 March 2014). **"Michelin Made Carbon Fiber Wheels For Citroën Back In 1971"**. Jalopnik. Archived from the original on 18 May 2015. Retrieved 31 July 2015.
  34. ^ L:aChance, David (April 2007). **"Reinventing the Wheel Leave it to Citroën to bring the world's first resin wheels to market"**. Hemmings. Archived from the original on 6 September 2015. Retrieved 14 October 2015.
  35. ^ Ismail, N. **"Strengthening of bridges using CFRP composites."** najif.net.
  36. ^ Rahman, S. (November 2008). **"Don't Stress Over Prestressed Concrete Cylinder Pipe Failures"**. Opflow Magazine. **34** (11): 10–15. Bibcode: 2008Opflo..34k..10R. doi:10.1002/j.1551-8701.2008.tb02004.x. S2CID 134189821. Archived from the original on 2 April 2015.
  37. ^ Pike, Carolyn M.; Grabner, Chad P.; Harkins, Amy B. (4 May 2009). **"Fabrication of Amperometric Electrodes"**. Journal of Visualized Experiments (27). doi: 10.3791/1040. PMC 2762914. PMID 19415069.
  38. ^ **"ICC and Kookaburra Agree to Withdrawal of Carbon Bat"**. NetComposites. 19 February 2006. Archived from the original on 28 September 2018. Retrieved 1 October 2018.
  39. ^ **"Carbon Technology"**. Look Cycle. Archived from the original on 30 November 2016. Retrieved 30 November 2016.
  40. ^ **"The Perils of Progress"**. Bicycling Magazine. 16 January 2012. Archived from the original on 23 January 2013. Retrieved 16 February 2013.
  41. ^ **"Busted Carbon"**. Archived from the original on 30 November 2016. Retrieved 30 November 2016.
  42. ^ Zhao, Z.; Gou, J. (2009). **"Improved fire retardancy of thermoset composites modified with carbon nanofibers"**. Sci. Technol. Adv. Mater. **10** (1): 015005.

**Bibcode:2009STAdM..10a5005Z. doi:10.1088/1468-6996/10/1/015005. PMC 5109595. PMID 27877268.**

43. ^ **"Carbon fibre reinforced plastic bogies on test"**. Railway Gazette. 7 August 2016. **Archived** from the original on 8 August 2016. Retrieved 9 August 2016.
44. ^ Lomov, Stepan V.; Gorbatiikh, Larissa; Kotanjac, Āfâ€ŒĀ,Ā½eljko; Koissin, Vitaly; Houille, Matthieu; Rochez, Olivier; Karahan, Mehmet; Mezzo, Luca; Verpoest, Ignaas (February 2011). **"Compressibility of carbon woven fabrics with carbon nanotubes/nanofibres grown on the fibres"** (PDF). Composites Science and Technology. **71** (3): 315–325. doi:10.1016/j.compscitech.2010.11.024.
45. ^ Hans, Kreis (2 July 2014). **"Carbon woven fabrics"**. compositesplaza.com. Archived from **the original** on 2 July 2018. Retrieved 2 January 2018.
46. ^ Ali Nahran, Shakila; Saharudin, Mohd Shahneel; Mohd Jani, Jaronie; Wan Muhammad, Wan Mansor (2022). **"The Degradation of Mechanical Properties Caused by Acetone Chemical Treatment on 3D-Printed PLA-Carbon Fibre Composites"**. In Ismail, Azman; Dahalan, Wardiah Mohd; Öchsner, Andreas (eds.). Design in Maritime Engineering. Advanced Structured Materials. Vol. 167. Cham: Springer International Publishing. pp. 209–216. doi:10.1007/978-3-030-89988-2\_16 . ISBN 978-3-030-89988-2. S2CID 246894534.
47. ^ **"Polyamid CF Filament – 3D Druck mit EVO-tech 3D Druckern"** [Polyamide CF Filament – 3D printing with EVO-tech 3D printers] (in German). Austria: EVO-tech. **Archived** from the original on 30 April 2019. Retrieved 4 June 2019.
48. ^ Schinner, G.; Brandt, J.; Richter, H. (1 July 1996). **"Recycling Carbon-Fiber-Reinforced Thermoplastic Composites"**. Journal of Thermoplastic Composite Materials. **9** (3): 239–245. doi:10.1177/089270579600900302. ISSN 0892-7057.
49. ^ Roux, Maxime; Eguémann, Nicolas; Dransfeld, Clemens; Thiébaud, Frédéric; Perreux, Dominique (1 March 2017). **"Thermoplastic carbon fibre-reinforced polymer recycling with electrodynamical fragmentation: From cradle to cradle"**. Journal of Thermoplastic Composite Materials. **30** (3): 381–403. doi: 10.1177/0892705715599431. ISSN 0892-7057.
50. ^ Bernatas, Rebecca; Dagréou, Sylvie; Despax-Ferreres, Auriane; Barasinski, Anaïs (2021). **"Recycling of fiber reinforced composites with a focus on thermoplastic composites"**. Cleaner Engineering and Technology. **5**: 100272. Bibcode:2021CEngT...500272B. doi:10.1016/j.clet.2021.100272.
51. ^ Naqvi, S. R.; Prabhakara, H. Mysore; Bramer, E. A.; Dierkes, W.; Akkerman, R.; Brem, G. (1 September 2018). **"A critical review on recycling of end-of-life carbon fibre/glass fibre reinforced composites waste using pyrolysis towards a circular economy"**. Resources, Conservation and Recycling. **136**: 118–129. Bibcode:2018RCR...136..118N. doi:10.1016/j.resconrec.2018.04.013. ISSN 0921-3449.
52. ^ Zhang, Jin; Chevali, Venkata S.; Wang, Hao; Wang, Chun-Hui (15 July 2020). **"Current status of carbon fibre and carbon fibre composites recycling"**. Composites Part B: Engineering. **193**: 108053. doi: 10.1016/j.compositesb.2020.108053. ISSN 1359-8368.

53. <sup>^</sup> Cousins, Dylan S.; Suzuki, Yasuhito; Murray, Robynne E.; Samaniuk, Joseph R.; Stebner, Aaron P. (1 February 2019). **"Recycling glass fiber thermoplastic composites from wind turbine blades"**. *Journal of Cleaner Production*. **209**: 1252–1263. **Bibcode:2019JCPro.209.1252C**. doi:10.1016/j.jclepro.2018.10.286. **ISSN 0959-6526**.
54. <sup>^</sup> Bernatas, Rebecca; Dagreou, Sylvie; Despax-Ferreres, Auriane; Barasinski, Anaïs (1 December 2021). **"Recycling of fiber reinforced composites with a focus on thermoplastic composites"**. *Cleaner Engineering and Technology*. **5**: 100272. **Bibcode:2021CEngT...500272B**. doi:10.1016/j.clet.2021.100272. **ISSN 2666-7908**.
55. <sup>^</sup> **"Zyvex Performance Materials Launch Line of Nano-Enhanced Adhesives that Add Strength, Cut Costs"** (PDF) (Press release). Zyvex Performance Materials. 9 October 2009. Archived from **the original** (PDF) on 16 October 2012. Retrieved 26 March 2015.
56. <sup>^</sup> Trimble, Stephen (26 May 2011). **"Lockheed Martin reveals F-35 to feature nanocomposite structures"**. *Flight International*. **Archived** from the original on 30 May 2011. Retrieved 26 March 2015.
57. <sup>^</sup> Pozegic, T. R.; Jayawardena, K. D. G. I.; Chen, J-S.; Anguita, J. V.; Balocchi, P.; Stolojan, V.; Silva, S. R. P.; Hamerton, I. (1 November 2016). **"Development of sizing-free multi-functional carbon fibre nanocomposites"**. *Composites Part A: Applied Science and Manufacturing*. **90**: 306–319. doi:10.1016/j.compositesa.2016.07.012. hdl:1983/9e3d463c-20a8-4826-89f6-759e950f43e6. **ISSN 1359-835X**. **S2CID 137846813**. **Archived** from the original on 1 October 2021. Retrieved 1 October 2021.
58. <sup>^</sup> **"AROVEX™ Nanotube Enhanced Epoxy Resin Carbon Fiber Prepreg – Material Safety Data Sheet"** (PDF). Zyvex Performance Materials. 8 April 2009. Archived from **the original** (PDF) on 16 October 2012. Retrieved 26 March 2015.

## External links

[**edit**]

 not found or type unknown

Wikimedia Commons has media related to **Carbon fiber reinforced plastic**.

- **Japan Carbon Fiber Manufacturers Association (English)**
- **Engineers design composite bracing system for injured Hokie running back Cedric Humes**
- **The New Steel** a 1968 *Flight* article on the announcement of carbon fiber
- **Carbon Fibres – the First Five Years** A 1971 *Flight* article on carbon fiber in the aviation field

**Authority control databases:** **National**  **Germany**  **Spain**  **France**  **Italy**  **United States**  **United Kingdom**  **Canada**  **China**  **Japan**  **South Korea**  **India**  **Israel**  **Australia**  **South Africa**  **Sweden**  **Norway**  **Denmark**  **Finland**

## About Soil mechanics

Soil mechanics is a branch of soil physics and applied mechanics that defines the actions of soils. It varies from fluid mechanics and solid mechanics in the sense that soils contain a heterogeneous blend of liquids (generally air and water) and particles (normally clay, silt, sand, and gravel) however soil might additionally have organic solids and other issues. In addition to rock mechanics, soil mechanics supplies the academic basis for evaluation in geotechnical engineering, a subdiscipline of civil design, and engineering geology, a subdiscipline of geology. Soil mechanics is used to evaluate the distributions of and circulation of fluids within all-natural and man-made frameworks that are supported on or made from soil, or structures that are buried in soils. Instance applications are developing and bridge structures, preserving wall surfaces, dams, and hidden pipe systems. Concepts of soil technicians are likewise used in relevant techniques such as geophysical design, coastal engineering, agricultural engineering, and hydrology. This write-up defines the genesis and make-up of soil, the difference in between pore water stress and inter-granular effective tension, capillary activity of liquids in the soil pore spaces, soil category, seepage and leaks in the structure, time reliant change of quantity because of squeezing water out of little pore areas, also known as debt consolidation, shear strength and stiffness of soils. The shear strength of soils is primarily stemmed from rubbing in between the fragments and interlocking, which are extremely conscious the effective anxiety. The article ends with some instances of applications of the concepts of soil mechanics such as slope stability, lateral earth stress on retaining walls, and bearing capacity of structures.

.

## About Cook County

### Driving Directions in Cook County

---

**Driving Directions From 42.088525008778, -88.079435634324 to**

**Driving Directions From 42.021124436568, -88.109125186152 to**

**Driving Directions From 42.017845685371, -88.11591807218 to**

Driving Directions From 42.084324223519, -88.137710099374 to

Driving Directions From 42.10843482977, -88.114090738222 to

Driving Directions From 42.086153671225, -88.19640031169 to

Driving Directions From 42.051159627372, -88.202951526236 to

Driving Directions From 42.008657936699, -88.152725208607 to

Driving Directions From 42.007242948498, -88.153060682778 to

Driving Directions From 42.073881347839, -88.179224443136 to

<https://www.google.com/maps/place/@42.050000207566,-88.075050390596,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.087798734568,-88.063295005626,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.10843482977,-88.114090738222,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.050966333631,-88.065085692084,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.03783000352,-88.074000387298,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.047694157891,-88.091046817967,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.010753136556,-88.109359678334,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.056354483873,-88.088327608895,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.102108978802,-88.091450952786,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/place/@42.042207985309,-88.186095527361,25.2z/data=!4m6!3m5!1sNone!8m2!3d42.0637725!4d-88.1396465!16s%2F>

<https://www.google.com/maps/dir/?api=1&origin=42.042207985309,-88.186095527361&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+US&travelmode=driving&query=foundation+settlement+signs>

<https://www.google.com/maps/dir/?api=1&origin=42.011697190191,-88.159742980637&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+US&travelmode=transit&query=structural+engineer+consultant>

<https://www.google.com/maps/dir/?api=1&origin=42.068719913035,-88.076011775936&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+US&travelmode=transit&query=foundation+stability+check>

<https://www.google.com/maps/dir/?api=1&origin=42.040913746131,-88.212085693635&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+US>



wSxDtinD4gRiv4kY3RRh9U&travelmode=transit&query=helical+pier+installation+Scha

<https://www.google.com/maps/dir/?api=1&origin=42.002740342082,-88.143950765717&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+wSxDtinD4gRiv4kY3RRh9U&travelmode=transit&query=sprayed+urethane+foam+lifting>

<https://www.google.com/maps/dir/?api=1&origin=42.10843482977,-88.114090738222&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+wSxDtinD4gRiv4kY3RRh9U&travelmode=transit&query=house+leveling+service+Des+F>

<https://www.google.com/maps/dir/?api=1&origin=42.089226014242,-88.21676191398&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+wSxDtinD4gRiv4kY3RRh9U&travelmode=driving&query=crawl+space+underpinning+E>

<https://www.google.com/maps/dir/?api=1&origin=42.076323560785,-88.219373904701&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+wSxDtinD4gRiv4kY3RRh9U&travelmode=transit&query=slab+foundation+lifting+Hoffm>

<https://www.google.com/maps/dir/?api=1&origin=42.097395420237,-88.146014933305&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+wSxDtinD4gRiv4kY3RRh9U&travelmode=transit&query=sinking+basement+floor+Bolin>

<https://www.google.com/maps/dir/?api=1&origin=42.027868101227,-88.201484266296&destination=%2C+2124+Stonington+Ave%2C+Hoffman+Estates%2C+wSxDtinD4gRiv4kY3RRh9U&travelmode=driving&query=water+intrusion+prevention+M>

United Structural Systems of Illinois, Inc

Phone : +18473822882

City : Hoffman Estates

State : IL

Zip : 60169

Address : 2124 Stonington Ave

### **Google Business Profile**

Company Website : <https://www.unitedstructuralsystems.com/>

## USEFUL LINKS

[foundation crack repair Chicago](#)

[residential foundation inspection](#)

[home foundation leveling](#)

[basement foundation repair](#)

[Sitemap](#)

[Privacy Policy](#)

[About Us](#)

Follow us